


**ROCK ARMORED
CATCHMENT
CONVEYANCE SYSTEM**

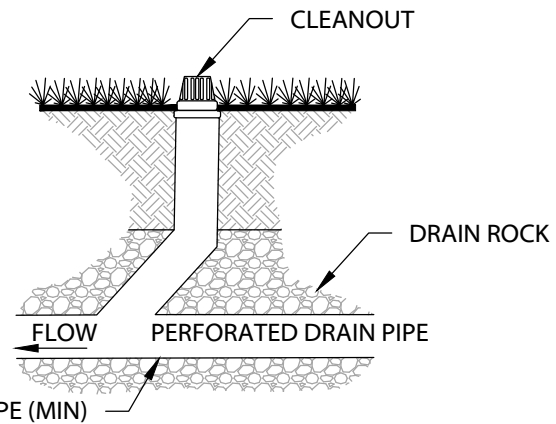

CLEANOUT

NOTES:

1. THE TRENCH SHALL BE CONSTRUCTED ON A CONTINUOUS GRADE WITH NO REVERSE GRADES OR LOW SPOTS.
2. SOILS UNDER THE DRAIN SHALL BE STABILIZED WITH GRAVEL OR OTHER SUITABLE MATERIAL.
3. DRAIN ROCK SHALL BE PLACED AS SPECIFIED WITH AT LEAST 3 INCHES OF ROCK ON ALL SIDES OF THE PIPE.
4. BACKFILL MATERIAL SHALL BE PLACED IN THE TRENCH IN SUCH A MANNER THAT THE DRAIN PIPE IS NOT DISPLACED OR DAMAGED.

Subsurface Drain



**TAHOE
REGIONAL
PLANNING
AGENCY**

THE TAHOE REGIONAL PLANNING AGENCY (TRPA) SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF ELECTRONIC COPIES OF THIS DETAIL.

BMP-307
November 2012